

CHR[®] M SERIES

2 Mil Polyester, Rubber Adhesive Tape

CHR M-Series (2 Mil PET/Rubber Adhesive) is manufactured by **Saint-Gobain[®]** Performance Plastics Corporation, Tape Solutions business, and comes with polyester film with rubber pressure-sensitive adhesive.

Features/Benefits


Polyester backing resists damage from sharp edges, and protects tool surfaces from abuse and adhesive flash in vacuum bag sealing. M783 will function at temperatures through 130°C. The adhesive is specially formulated to remove cleanly from most surfaces after up to 4.0 hours at 177°C. Polyester backings offer low cost, effective positioning tape for composite lay-ups prior to bag sealing. M852 consisting of rubber adhesive is specially formulated to use as a flash mask protection tape in metal or composite bonding. The non-silicone adhesive eliminates silicone contamination and is specially formulated to remove cleanly from most surfaces after up to 4.0 hours at 177 °C. Also, polyester backings offer low cost, effective positioning tape for composite lay-ups prior to bag sealing. M852 functions at temperatures through 130°C.

Availability

M783 is in master log form 66 m × 914 mm (72 yd × 36 in) wide. Rolls can be slit 6.35 mm (0.25 in) wide through full width. Factory stock for M852 is in master log form 66 m × 965 mm (72 yd × 38 in) wide. Rolls can be slit from 12.7 mm to 965 mm (0.5 in to 38 in) wide. M783 and M852 are available with or without a liner.

Applications

M783 and M852 offer economical methods to hold, insulate and/or protect materials, including capacitor and coil applications.

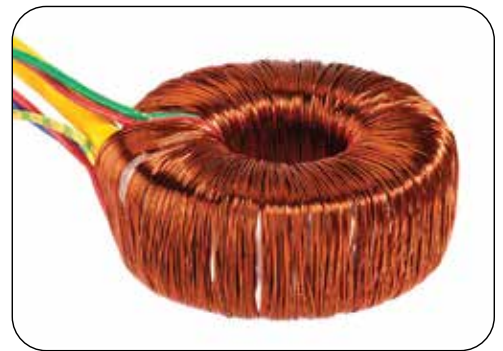

CHR M Series 2 Mil Polyester Rubber Adhesive Tape Properties

Performance tests are run using standard test procedures.

The values presented are typical values and should not be used for specification purposes.

Product Number	M783	M852
Adhesive Type	Rubber	Rubber
Total Thickness mm (mil)	0.094 (3.7)	0.102 (4.0)
Adhesive Thickness mm (mil)	0.043 (1.7)	0.051 (2.0)
Adhesion to Steel N/cm (oz/in)	3.8 (35)	1.6 (15)
Tensile Strength N/cm (lb/in)	88 (50)	88 (50)
Elongation (% at break)	120	120
Dielectric Strength (volts)	6,000	6,000
Operating Temperature °C (°F)	-18 to +163 (0 to +325)	-18 to +177 (0 to +350)
Insulation Class (°C)	130	130
Colour	Pink	Green

IMPORTANT: It is the user's responsibility to ensure the suitability and safety of Saint-Gobain products for all intended uses and that the materials to be used comply with all applicable regulatory requirements. Saint-Gobain assumes no responsibility for any product failures that occur due to your actions or inactions, including your use, design, fabrication or application of the products into which the materials are incorporated.

WARRANTY: This document should not be considered a warranty or a guarantee. The descriptions of the Product provided hereinabove may vary based on specifications requested and testing protocols. Typically, Saint-Gobain warrants that product(s) will meet mutually agreed specifications at delivery and Saint-Gobain honors any breach of warranty claims for six (6) months from delivery of the products. If a product is determined to be nonconforming with its warranty, Saint-Gobain's sole obligation is, at its option, to either replace the nonconforming products or reimburse the purchase price for the same.

The only obligation under any applicable product warranty will be to replace any portion proving defective, or at our option, to refund the purchase price thereof. SAINT-GOBAIN DISCLAIMS ALL OTHER EXPRESS OR IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR USE.

Form #1108 | © Saint-Gobain February 2025 | All the mentioned trademarks are registered trademarks of Saint-Gobain Tape Solutions or affiliates, part of Saint-Gobain group.



TAPE SOLUTIONS

North America | South America
Europe | Asia

For more information, please visit
tapesolutions.saint-gobain.com