

CHR® M SERIES

1 Mil Polyester, Rubber Adhesive Tape

CHR M-Series (1 Mil PET/Rubber adhesive) is manufactured by **Saint-Gobain®** Performance Plastics Corporation, Tape Solutions business, and comes with polyester film with rubber pressure-sensitive adhesive.

Features/Benefits


M54A and M56 can meet MIL-I-15126 MFT Type 2.5 specifications which is superseded by A-A-59770A Type 5 and 6, specification. M54A makes easy to apply electrical insulation and meets UL Guide OANZ2, File E51201 specifications. M734 offers no build-up of adhesion properties after processing. M797 resists high temperatures of conformal coating operation, is silicone free, and creates a true masking line. M851 is intended to use as a flash mask protection tape in metal or composite bonding. The polyester backing resists damage from sharp edges. Polyester backings offer low-cost, effective holding for materials. Operating temperature is -18 to +163°C (0 to +325°F), elongation % at break is 100, tensile strength is 44 N/cm (25 lb/in) and dielectric strength is 5,000 volts.

Availability

M54A is in master log form 66 m × 940 mm (72 yd × 37 in) wide. M56 and M851 are in master log form 66 m × 965 mm (72 yd × 38 in) wide. M797 is in master log form 66 m × 914 mm wide (72 yd × 36 in). All rolls can be slit 12.7 mm wide through master log width. Use jumbo roll form for rewinding slitting. Special widths are available upon request. M734 factory stock is manufactured 914 mm (36 in) wide. It is re-rolled into 132 m long master rolls for single knife slitting to make slit rolls from 12.7 mm wide through full width. M54A and M56 are available with or without a liner.

Applications

M54A, M56, M797 and M851 offer economical methods to hold, insulate and/or protect various materials. M54A and M56 are often used in critical capacitor and coil applications. M734 was created for use in multi-layer printed circuit boards manufacturing as an area mask tape.

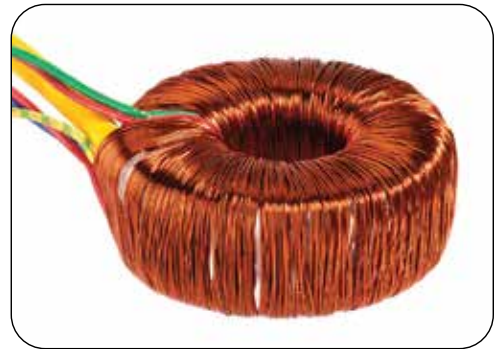

CHR M Series 1 Mil Polyester Rubber Tape Properties

Performance tests are run using standard test procedures.

The values presented are typical values and should not be used for specification purposes.

Product Number	M54A	M56	M734	M797	M851
Adhesive Thickness mm (mil)	0.038 (1.5)	0.038 (1.5)	0.015 (0.6)	0.051 (2.0)	0.051 (2.0)
Total Thickness mm (mil)	0.064 (2.5)	0.064 (2.5)	0.041 (1.6)	0.076 (3.0)	0.076 (3.0)
Adhesion to Steel N/cm (oz/in)	4.9 (45)	4.9 (45)	0.7 (6)	3.3 (30)	1.6 (15)
Insulation Class (°C)	130	130	130	130	130
Colour	Yellow	Clear	Orange	Mustard	Green

IMPORTANT: It is the user's responsibility to ensure the suitability and safety of Saint-Gobain products for all intended uses and that the materials to be used comply with all applicable regulatory requirements. Saint-Gobain assumes no responsibility for any product failures that occur due to your actions or inactions, including your use, design, fabrication or application of the products into which the materials are incorporated.

WARRANTY: This document should not be considered a warranty or a guarantee. The descriptions of the Product provided hereinabove may vary based on specifications requested and testing protocols. Typically, Saint-Gobain warrants that product(s) will meet mutually agreed specifications at delivery and Saint-Gobain honors any breach of warranty claims for six (6) months from delivery of the products. If a product is determined to be nonconforming with its warranty, Saint-Gobain's sole obligation is, at its option, to either replace the nonconforming products or reimburse the purchase price for the same.

The only obligation under any applicable product warranty will be to replace any portion proving defective, or at our option, to refund the purchase price thereof. SAINT-GOBAIN DISCLAIMS ALL OTHER EXPRESS OR IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR USE.

Form #1109 | © Saint-Gobain November 2025 | All the mentioned trademarks are registered trademarks of Saint-Gobain Tape Solutions or affiliates, part of Saint-Gobain group.



TAPE SOLUTIONS

North America | South America
Europe | Asia

For more information, please visit
tapesolutions.saint-gobain.com